

## 150Mbps 802.11n Wireless 3G Router



### 3G Broadband Sharing

PLANET Wireless 3G Router, WNRT-617G, provides home and SOHO users with a reliable and cost effective wireless solution by featuring 3G / WAN backup Internet access and high speed IEEE 802.11n wireless transmission. The WNRT-617G is equipped with one USB port for connection to mobile network of UMTS / HSPA / EVDO via 3G/3.5G USB modem and one WAN port for wired cable and DSL service connection. The 3G/3.5G USB capability of the WNRT-617G features activating internet connection anytime and the redundant WAN interface to ensure the most reliable connection. The WNRT-617G provides more flexible and easier way for users to create an instant wireless network sharing service via 3G modem wherever at home, hotspot or in public places like transportation, outdoor event and more.

### High Speed 802.11n Wireless Feature

The WNRT-617G features the latest IEEE 802.11n radio with 1T1R antenna technology to provide improved wireless speed and coverage with up to 150Mbps upload and download data rate. The incredible wireless speed makes it ideal for handling multiple video stream, on-line music, VoIP and data streams at the same time stably and smoothly. It is also backward compliant with 802.11g and 802.11b standards; thus it does not need to change the existing network for maintaining connectivity. Just connect to the WNRT-617G and you can immediately enjoy the high-speed wireless sharing.

### Wireless Coverage Plus !

With one 5dBi high-gain antenna attached, the WNRT-617G provides stronger signal quality and more excellent performance than normal wireless routers especially when in the long range or poor environment condition for further wireless coverage range. With the detachable RP-SMA connector design, the WNRT-617G allows users to manually exchange higher gain antenna for greater wireless distances and coverage range across home and building. Besides essential wireless sharing for Wi-Fi clients, the WNRT-617G provides WDS (Wireless Distribution System) bridge mode to facilitate wireless network deployments and range expansion. It provides more flexibility for users while establishing wireless network.

### IEEE Compliant Wireless & Wired LAN

- Compliant with IEEE 802.11n wireless technology capable of up to 150Mbps data rate
- Backward compatible with 802.11b/g standard
- Equipped with four LAN ports (10/100Mbps) and one WAN port (10/100Mbps), Auto MDI/MDI-X supported

### 3G / 3.5G Mobile Internet Connection

- Dual Network Interfaces: WAN port for cable / wired DSL service and 3G mobile connection
- Compatible with UMTS / HSPA / EVDO Mobile Network

### Fixed-Network Broadband Router

- Internet types: Dynamic IP/ Static IP / PPPoE / Telstra Big Pond / L2TP / PPTP
- Supports Static Routing, WDS, UPnP, Dynamic DNS

### Secure Network Connection


- Supports Wi-Fi Protected Setup (WPS)
- Advanced security: 64/128/152-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK with TKIP/AES Encryption, and 802.1x Authentication.
- Supports NAT firewall features, with SPI function to protect against DoS attacks
- IP / Protocol-Based access control and MAC Filtering

### Wide Range of Wireless Security Support

To secure the wireless communication, the WNRT-617G supports not only 64/128/152-Bit WEP, but also up-to-date encryptions including WPA-PSK/WPA2-PSK with TKIP/AES, wireless MAC filtering and SSID broadcast control to consolidate the wireless network security and prevent unauthorized wireless connection.

### Easy, Secure Wireless Connection

In order to simplify security settings for home and SOHO network, the WNRT-617G supports Wi-Fi Protected Setup (WPS), which has two connections: PBC and PIN. Just press the WPS button or key in the PIN code, the secure connection between the WNRT-617G and wireless clients will be built immediately, offering a convenient and fast method for users.

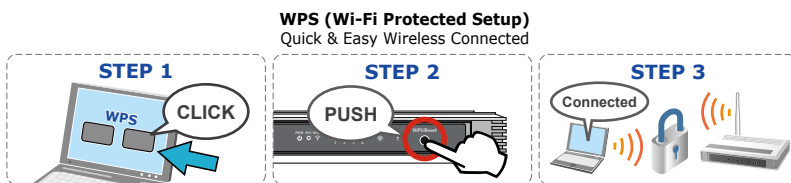

### Advanced Firewall Security

To protect user's network from external attacks, the WNRT-617G provides dual firewall mechanisms – NAT and SPI. The NAT function allows multiple users to access to Internet via a single legal IP, and the SPI (Stateful Packet Inspection) firewall protects intranet PCs from unauthorized access and prevents possible DoS attacks from the Internet. In aspect of firewall, the WNRT-617G supplies flexible IP-based access control, schedulable MAC access control and URL block to prevent possible hackers attack.

### Full Functioned Router

As a robust broadband router, the WNRT-617G supports various Internet connection protocols and auto detect function to establish Internet service when the ISPs use different connection types. It also provides Virtual Server and DMZ functions for LAN PC to act as an application server and offer certain service to the clients in the LAN. The WNRT-617G allows users to setup trigger ports of special applications and utilize Internet services smoothly. Moreover, IP-based ingress and egress bandwidth control optimizes time-critical applications such as VoIP or video conference not to be interrupted or lagged due to P2P file downloaded by other clients in the same network environment.

### Easy to Set up

Users can easily configure the wireless router by running the Smart Setup! wizard included in the CD-ROM provided in the package. Just click the wizard and set up step by step. You can easily get in the wireless network and enjoy high speed Internet transmission in your home or office.

### Advanced Networking function for Specific Application

- Supports multiple sessions IPSec, L2TP and PPTP VPN pass-through
- Supports Virtual Server, ALG, DMZ and UPnP for various networking applications
- Supports DHCP Server


### Easy Installation & Management

- Web-Based UI for quick setup and easy configuration
- Remote Management allows configuration from a remote site
- System status monitoring includes DHCP Client and System Log

## Applications

### Sharing Mobile Wireless Network Anytime, Anywhere

Via connecting USB 3G Modem to WNRT-617G, you can enjoy surfing the Internet instantly. The built-in one WAN port in the WNRT-617G is not only for wired cable or DSL connection service but also can be used as an alternative to sharing network with your neighbors. The WNRT-617G applied with 802.11n technology provides a better wireless signal, and higher data transmission rate and performance than 802.11g. Furthermore, featuring the latest security and firewall functions, the WNRT-617G helps to prevent unauthorized access or invasion. Just click the Wizard and set it up step by step. You can then relax to get in the wireless network and enjoy high speed Internet transmission anywhere, anytime.

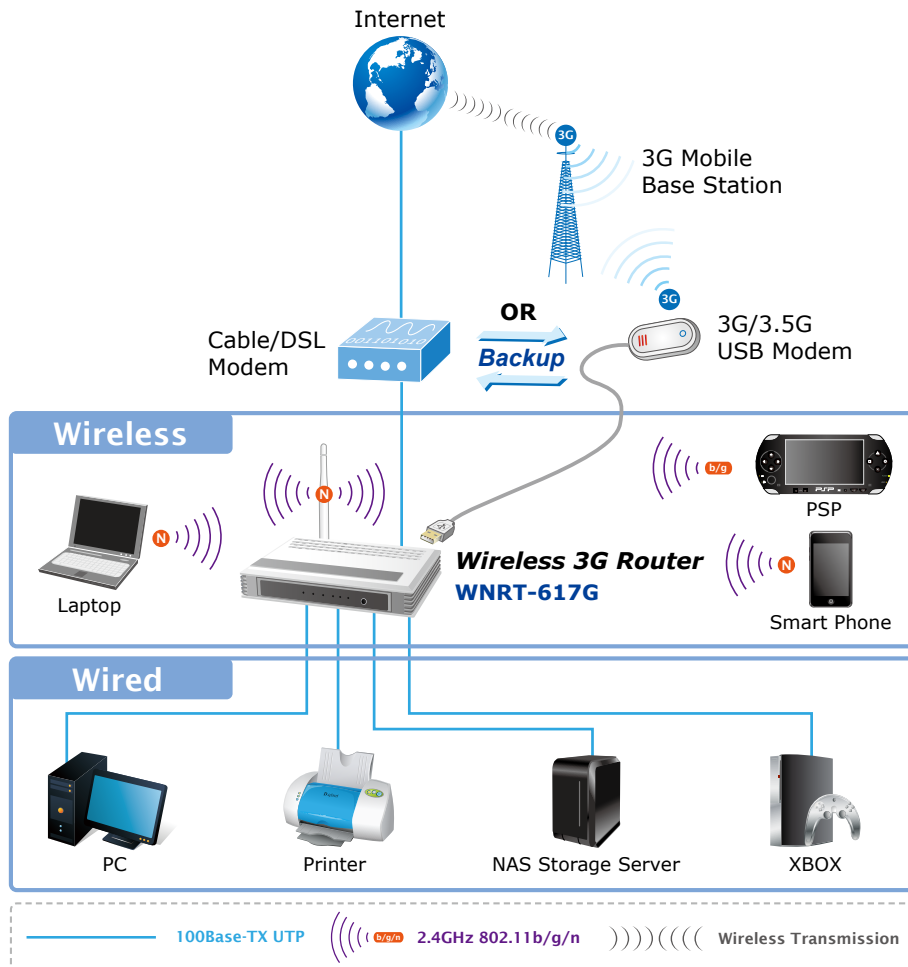

## Product Specifications

Product	WNRT-617G 150Mbps 802.11n Wireless 3G Router	
<b>Hardware Specifications</b>		
Interface	WAN Port	1 x 10/100Mbps Auto MDI/MDI-X RJ45 port
	LAN Port	4 x 10/100Mbps Auto MDI/MDI-X RJ45 ports
	USB port	1 x USB 2.0 port
Antenna	Gain	1 x Detachable RP-SMA Connector 1 x 5dBi SMA antenna included in the package
	Orientation	Omni-directional
Power Button	Power On/Off button at rear panel	
WPS / Reset Button	WPS / Reset button at front panel Push the button at least 5 seconds to reset to factory default setting	
LED Indicators	PWR, SYS, WLAN, LAN x 4, WAN, 3G, WPS with green light	
Material	Plastic	
Dimensions (W x D x H)	174 x 110 x 23 mm	
Weight	200g	
Power Requirements	9V DC, 0.85A	
<b>Wireless interface Specifications</b>		
Standard	Compliant with IEEE 802.11b/g/n	
Frequency Band	2.4~2.4835GHz	
Extend Frequency	DSSS	
Modulation Type	DBPSK, DQPSK, QPSK, CCK and OFDM (BPSK/QPSK/16-QAM/ 64-QAM)	
Data Transmission Rates	802.11n: 135/121.5/108/81/54/40.5/27/13.5Mbps 130/117/104/78/52/39/26/13Mbps 65/58.5/52/39/26/19.5/13/6.5Mbps (Dynamic) 802.11g: 54/48/36/24/18/12/9/6Mbps (Dynamic) 802.11b: 11/5.5/2/1Mbps (Dynamic)	
Transmission Distance	Indoor up to 100m Outdoor up to 300m (It is limited to the environment)	
Channel	America/ FCC: 2.414~2.462GHz (11 Channels) Europe/ ETSI: 2.412~2.472GHz (13 Channels) Japan/ TELEC: 2.412~2.484GHz (14 Channels)	
RF Power	High: 18 dBm (max) Middle: 15 dBm Low: 12 dBm	
Receive Sensitivity	130M: -68dBm@10% PER 108M: -68dBm@10% PER 54M: -68dBm@10% PER 11M: -85dBm@8% PER 6M: -88dBm@10% PER 1M: -90dBm@8% PER	
<b>Wireless Management Features</b>		
Wireless Operation Mode	AP, WDS (AP+Bridge), WISP Client Router	
Encryption Security	WEP (64/128/152-bit) encryption security WPA-PSK / WPA2-PSK (TKIP/AES) WPA / WPA2 (TKIP/AES) WPA / WPA2 enterprise mode (802.1x authentication)	
Wireless Security	Provides wireless LAN ACL (Access Control List) filtering Wireless MAC address filtering Supports WPS (Wi-Fi Protected Setup ) Enable / Disable SSID Broadcast	
Wireless Advanced Features	Supports 802.11e WMM (Wi-Fi Multimedia) Supports Wireless Roaming Provides Wireless Statistics	

Router Features	
Internet Connection Type	Shares data and Internet access for users by supporting the following protocols: <ul style="list-style-type: none"> <li>▪ PPPoE / Russia PPPoE</li> <li>▪ Dynamic IP</li> <li>▪ Static IP</li> <li>▪ Telstra Big Pond</li> <li>▪ PPTP / Russia PPTP</li> <li>▪ L2TP / Russia L2TP</li> </ul>
Firewall	NAT firewall with SPI (Stateful Packet Inspection) NAT with ALG (Application Layer Gateway) Built-in NAT server supporting Virtual Server, and DMZ Built-in firewall with IP address filtering, Domain Name filtering, and MAC address filtering Supports ICMP-FLOOD, UDP-FLOOD, TCP-SYN-FLOOD filter, DoS protection
Routing Protocol	Static Routing
VPN Pass-through	PPTP, L2TP, IPSec
LAN	Built-in DHCP server supporting static IP address distributing Supports UPnP, Dynamic DNS Supports Flow Statistics IP & MAC Binding IP / Protocol-Based Bandwidth Control Session Number: Max. 5210
System Management	Web-Based (HTTP) management interface Remote management SNTP time synchronize Easy firmware upgrade System Log supports auto mail and save to local host
OS Compatibility	Windows 7 (32-bit/64-bit) Windows Vista (32-bit/64-bit) Windows XP Mac OSX 10.4 and higher
Standards Conformance	
IEEE Standards	IEEE 802.11n (1T1R, up to 150Mbps) IEEE 802.11g IEEE 802.11b IEEE 802.11i IEEE 802.3 10Base-T IEEE 802.3u 100Base-TX IEEE 802.3x Flow Control
Other Protocols and Standards	CSMA/CA, CSMA/CD, TCP/IP, DHCP, ICMP, NAT, PPPoE, SNTP
Environment	
Temperature	Operating: 0 ~ 40 degrees C Storage: -40 ~ 70 degrees C
Humidity	Operating: 10 ~ 90% (non-condensing) Storage: 5 ~ 90% (non-condensing)

## Ordering Information

WNRT-617G	150Mbps 802.11n Wireless 3G Router
-----------	------------------------------------

## Related Products

WNL-U554A	802.11n Wireless USB Adapter
WNL-U555HA	High Power 802.11n Wireless Compact USB Adapter
WNL-U556M	300Mbps 802.11n Wireless Micro-size USB Adapter
WNL-9501	802.11n Wireless PCI Express Adapter
ANT-OM5	5dBi Desktop Antenna

\* For best performance and wireless connection, sincerely advise to match the above related products.

### PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City  
 231, Taiwan (R.O.C.)  
 Tel: 886-2-2219-9518 Fax: 886-2-2219-9528  
 Email: sales@planet.com.tw www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2014 PLANET Technology Corp. All rights reserved.

C-WNRT-617Gv2