

10/100Base-TX to 100Base-FX Web Smart Media Converter



PLANET FT-90x Web Smart Media Converter series supports conversion between 10/100Base-TX and 100Base-FX network. There are SC/SFP/WDM connectors and single-mode/multi-mode media for your needs. The Ethernet signal allows two types of segments to connect easily, efficiently and inexpensively. This converter can be used as a stand-alone unit or as a slide-in module to PLANET Media Converter Chassis (MC-700, MC-1500 and MC-1500R / MC-1500R48).

Each Web Smart converter is able to manage through the Web interface. The powerful Web Smart Media Converter supports flow control, QoS, bandwidth control and ingress/egress rate control, etc. The statistics functions of the Web Smart converter help administrators to remotely analyse and count the packet flow of the current Ethernet link. Management function helps reduce the amount of valuable time that a network administrator spends detecting and locating network problems, otherwise it requires visual inspection of cabling and equipment.

The Web Smart function also includes the LLR and Loop Back Test. LLR can immediately alarm administrators the problem of the link media and provide efficient solution to monitoring the net. It provides more flexible settings for converters.


Features

- One-channel media conversion between 10/100Base-TX and 100Base-FX
- Complies with IEEE 802.3, IEEE 802.3u 10/100Base-TX, 100Base-FX standard
- Auto-negotiation for 100Base-TX Half-duplex or 100Base-TX Full-duplex
- Supports auto MDI/MDI-X function on RJ-45 Port
- Compact size works with PLANET MC family Media Chassis (MC-700/1000R/1500)
- TS-1000 OAM
- Built-in IP-based Web interface for remote management
- Supports PLANET Discovery Utility for deploy management
- Layer 2 Smart Feature
 - IEEE 802.3x Full-Duplex Flow-Control and Back-Pressure in Half-Duplex eliminate the loss of packets
 - Supports Maximum frame size to 2Kbytes.
 - Store-and-Forward mechanism
 - IEEE 802.1Q VLAN tagging
 - Two levels of priority queue
 - 802.1p QoS Scheme
 - Bandwidth Control (Kbps) for both Ingress and Egress
 - Broadcast Storm Control to optimize network bandwidth.
 - Ethernet Statistics on both TP and Fiber interface
 - Look Back Test Function (LBT) , Link Loss Return(LLR)
 - Firmware upgrade via HTTP protocol
 - SNMP Trap for alarm notification
- LED indicators for easy network diagnosing
- Reset Button at the front panel for resetting to factory default
- Choice of fiber-connector from SC, WDM, multi-mode / single-mode fiber /100Base SFP

Applications

Fiber-optic Networking for ISPs, enterprises, and homes

With high performance of data transmission and easy installation, the FT-90x series can build an ISP network solution of FTTH (Fiber to the Home) or FTTC (Fiber to the Curb) for ISPs and FTTB (Fiber to the Building) for small office network environment from enterprises. The Web management helps network administrators to monitor and setup the converter, speed and duplex through web browsers.

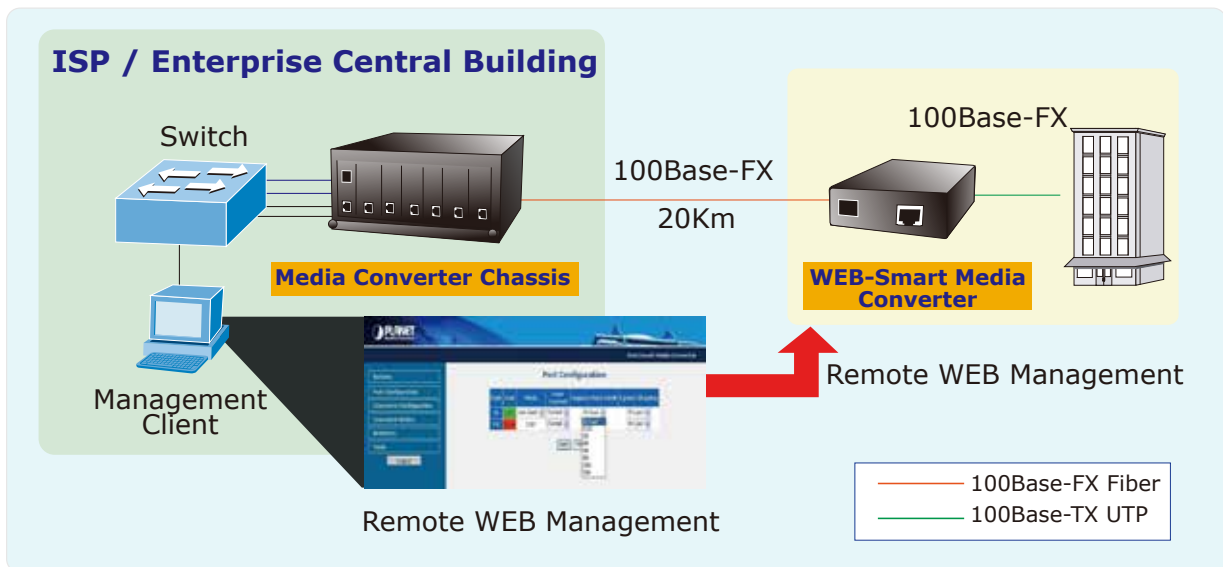

Specifications

Model	FT-90x Series
Hardware Specifications	
Standards	IEEE 802.3, 10Base-T IEEE 802.3u, 100Base-TX, 100Base-FX IEEE 802.3x, Flow Control IEEE 802.1p, Class of Service
Copper Port	1 x 10/100Base-TX RJ-45 port Auto-negotiation, Auto-MDI/MDI-x
Optical Port	1 x 100Base-FX
Fiber Connector	FT-902 : SC / Multi-mode / 2km FT-902S15 : SC / Single Mode / 15km FT-902S35 : SC / Single Mode / 35km FT-902S50 : SC / Single Mode / 50km FT-905A : SFP / Vary on transceiver module FT-906A20: WDM SC / Single Mode / 20km FT-906B20: WDM SC / Single Mode / 20km
Optic Wavelength	FT-902: 1310nm FT-902S15: 1310nm FT-902S35: 1310nm FT-902S50: 1310nm FT-905A: Vary on transceiver module FT-906A20: TX: 1310nm, RX: 1550nm FT-906B20: TX: 1550nm, RX: 1310nm
Launch Power (dBm) Max.	FT-902: -14 FT-902S15:0 FT-902S35:-8 FT-902S50:0 FT-905A:NA FT-906A20:-8 FT-906B20:-8

Launch Power (dBm) Min.	FT-902: -20 (62.5/125µm), -23.5 (50/125µm) FT-902S15: -20 FT-902S35: -15 FT-902S50:-5 FT-905A:NA FT-906A20:-14 FT-906B20:-14
Receive Sensitivity (dBm)	FT-902: -31.8 FT-902S15: -32 FT-902S35:-34 FT-902S50: -35 FT-905A:NA FT-906A20:-31 FT-906B20:-31
Maximum Input power (dBm)	FT-902: -14 FT-902S15:0 FT-902S35:0 FT-902S50:0 FT-905A: NA FT-906A20:0 FT-906B20:0
Speed-Twisted-pair	10/20Mbps for Half/Full-Duplex 100/200Mbps for Half/Full-Duplex
Speed-Fiber-optic	200Mbps for Full-Duplex
Cable-Twisted-pair	10Base-T: 2-pair UTP Cat. 3, 4, 5, up to 100 m 100Base-TX: 2-pair UTP Cat. 5, up to 100 m
Cable-Fiber-optic cable	• 50/125µm or 62.5/125µm multi-mode fiber cable, up to 2km. • 9/125µm single-mode cable, provides long distance for 15/20/35/50km or longer (very on SFP module)
LED Indicators	PWR, TP LINK/ACT, TP FDX, TP SPEED Fiber LINK/ACT, Fiber FDX
Power Consumption	5.5 Watts (maximum)
Power Input	5V/2A
Dimensions (W x D x H)	93 x 69 x 25 mm
Operating Environment	Operating temperature: 0 to 50 degrees C Humidity: 10~90% non-condensing
Storage Environment	Storage temperature: -25 to 70 degrees C Humidity: 10~90% non-condensing
Emission	FCC Class A, CE Class B

Ordering Information

FT-902	10/100Base-TX to 100Base-FX Web Smart Media Converter (SC,MM)-2km
FT-902S15	10/100Base-TX to 100Base-FX Web Smart Media Converter (SC,SM)-15km
FT-902S35	10/100Base-TX to 100Base-FX Web Smart Media Converter (SC,SM)-35km
FT-902S50	10/100Base-TX to 100Base-FX Web Smart Media Converter (SC,SM)-50km
FT-905A	10/100Base-TX to 100Base-FX Web Smart Media Converter (SFP)-up to 60Km
FT-906A20	10/100Base-TX to 100Base-FX Web Smart Media Converter (WDM,SM, TX:1310 RX:1550)-20km
FT-906B20	10/100Base-TX to 100Base-FX Web Smart Media Converter (WDM,SM, TX:1550 RX:1310)-20km

Related Products

MC-1500	15-Slot Media Converter Chassis
MC-1500R	15-Slot Media Converter Chassis (AC Power)
MC-700	7-Slot Media Converter Chassis
MFB-Series Transceiver	100Base-FX SFP Transceiver

PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City
231, Taiwan (R.O.C.)
Tel: 886-2-2219-9518 Fax: 886-2-2219-9528
Email: sales@planet.com.tw www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2014 PLANET Technology Corp. All rights reserved.

C-FT-90x Series