

## 4-Port SIP VoIP Gateway (4 FXS)



### Cost-effective, High-performance VoIP Communication

To build high-performance VoIP communications at a low cost, PLANET now introduces the latest member of its gateway family, the VGW-400FS enterprise-class 4-port SIP VoIP Gateway. The VGW-400FS gateway provides added flexibility during migration to Unified Communications by supporting the traditional analog devices, which include analog phones, fax machines, modems, voicemail systems, and speakerphones. It helps the company to save money on long-distance calls; for example, the remote workers can dial in through a Unified VoIP Communication System just like an extension call but no long-distance call charge would occur. The VGW-400FS also allows call to be transferred to anyone at any location within the voice system, which enables the enterprise to communicate more effectively and is helpful to streamline business processes.



### Standard Compliance

The VGW-400FS supports Session Initiation Protocol 2.0 (RFC 3261) for easy integration with general voice over IP system. The VGW-400FS is able to broadly interoperate with equipment provided by VoIP infrastructure providers, thus enabling them to provide their customers with better multi-media exchange services.

### Compliant with standard SIP RFC 3261



### Highlights

- Supports SIP 2.0 (RFC 3261)
- Supports IPv6 and IPv4 simultaneously
- Up to 4 SIP service domains and Caller ID
- Supports auto HTTP provision and fax feature
- Flexible Routes Plan, Dial Plan and SIP Trunk

### Internet Features

- IPv4 (RFC 791) and IPv6
- IPv6 auto configuration (RFC 4862)
- IPv6 only, IPv4 only or dual stack
- MAC clone setting
- Vendor Class ID
- DDNS (Planet DDNS, Easy DDNS, DynDNS)
- DNS client
- Firewall
- URL / IP / MAC / Port Filter
- Port forwarding (TCP, UDP or both)
- Bandwidth control (download and upload), maximum bandwidth priority setting

### SIP Applications

- SIP Session Timer (RFC 4028)
- SIP Session Refresher: UAC or UAS
- SIP Encryption
- Supports Outbound Proxy / STUN NAT Traversal
- Supports Primary and Backup SIP Server


### Call Features

- Supports peer to peer dialing
- 4-line FXS connects to analog phone set or PABX
- Caller ID recognition DTMF (before/after 1st ring) and FSK (before 1st ring), ETSI and Bellcore
- DTMF Caller ID start and stop BIT configurable
- T.38 fax volume configuration

**Enhanced, Full-Featured Business Gateway**


The VGW-400FS is a full-featured enhanced business SIP Gateway that addresses the communication needs of the enterprises. It provides the 4-line FXS gateway with SIP protocol IP device which allows connection with 4-line analog telephone set to make or receive VoIP call over Internet or VPN network. This device is suitable for office PABX to enable to have VoIP call without changing cabling, dial plan and extension number.

The VGW-400FS supports all kinds of SIP-based gateway features and multiple contact filter functions, such as 4 SIP trunk accounts, both IPv6 and IPv4 protocols, flexible dial plan and route plan features, and switch analog and VoIP signal to help both protocols to communicate.

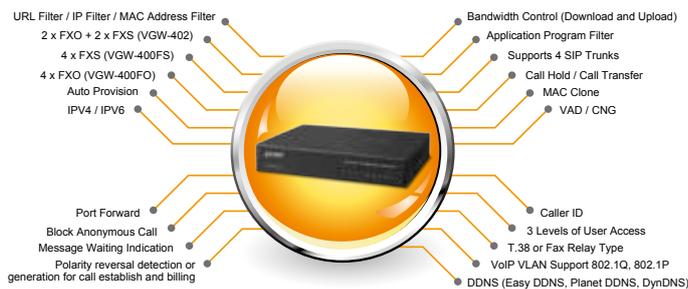

**Secure, High-Quality VoIP Communication**

It can effortlessly deliver secured toll voice quality by utilizing cutting-edge 802.1p QoS (Quality of Service), 802.1Q VLAN tagging, and IP TOS (Type of Service) technology. Using voice and data VLAN can easily separate the data and voice, thus maintaining the best quality.

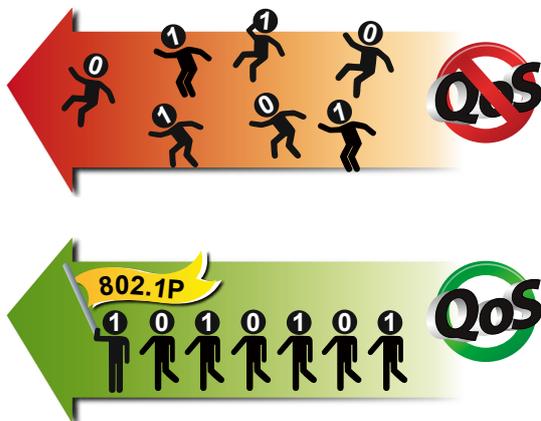

**Supporting Caller ID**

Both the FXS and FXO ports of the VGW-400 series support caller ID function, helping users identify calling number and verify number easily. It also helps to block anonymous call by filtering strange calls. The FXS port transmits Caller ID, while the FXO port receives Caller ID. The Caller ID interoperates with analog phones, public switched telephone networks (PSTN) and private branch exchanges (PBXs).




**FXS Line Configuration**

- Line ID / Line Phone number
- Polarity Reversal detection or generation for call establish and billing
- Outgoing SIP Caller ID selection
- Caller ID detection mode by country selection

**Routing Plan**

- Prefix match and length
- Priority / Cyclic / Simultaneous Ring
- Programmable Hunting Cycle

## Applications

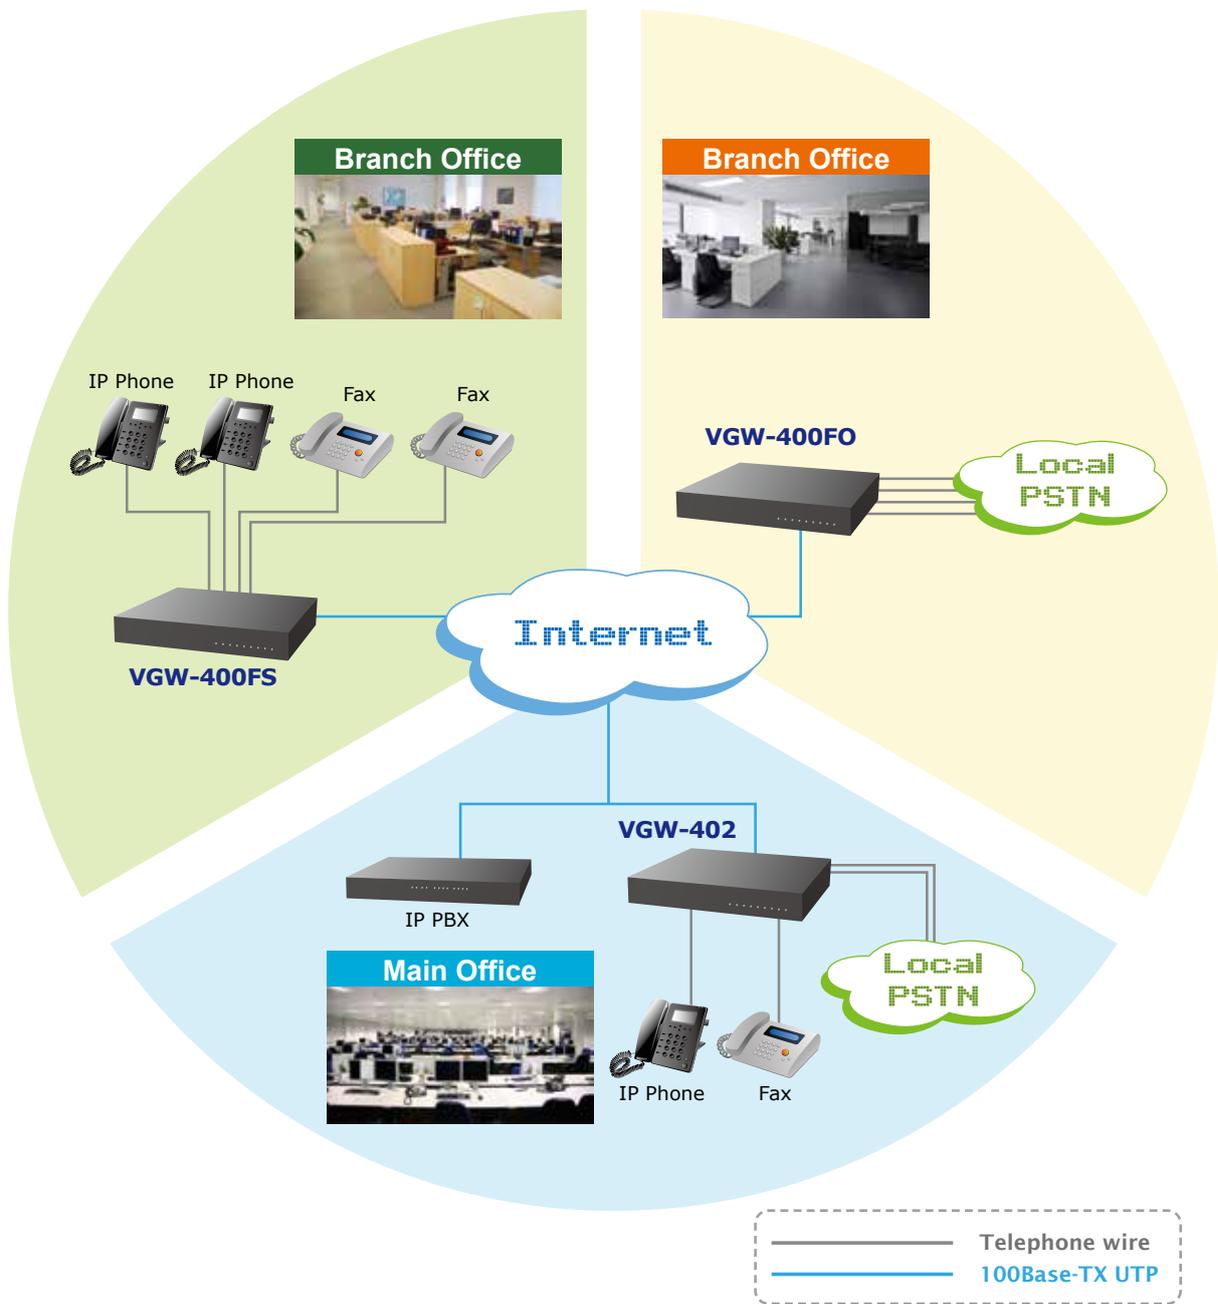

4-port SIP Gateway (VGW-400FS)

## Specifications

|          |                                |
|----------|--------------------------------|
| Product  | VGW-400FS                      |
| Hardware |                                |
| WAN      | 1 x 10/100Mbps RJ-45 port      |
| LAN      | 1 x 10/100Mbps RJ-45 port      |
| Voice    | 4 x RJ-11 connection (4 x FXS) |

Protocols and Standard

|                        |   |
|------------------------|---|
| <p>Data Networking</p> | <p>IPv4 (RFC 791) and IPv6<br/>         IPv6 auto configuration (RFC 4862)<br/>         IPv6 only, IPv4 only or dual stack<br/>         MAC address (IEEE 802.3)<br/>         MAC clone setting<br/>         Vendor Class ID<br/>         IP / ICMP / ARP / RARP / SNTP<br/>         Static IP<br/>         DHCP Client (RFC 2131), WAN port<br/>         DHCP Server, LAN port<br/>         NAT Server (RFC 1631)<br/>         PPPoE Client / DNS Client / TFTP Client<br/>         DDNS (Planet DDNS, Easy DDNS, DynDNS)<br/>         Firewall<br/>         URL / IP / MAC / Port Filter<br/>         Application Program Filter<br/>         Port Forwarding (TCP, UDP or both)<br/>         Bandwidth control (download and upload), maximum bandwidth priority setting<br/>         UPnP Server at LAN port<br/>         Behind NAT, use DMZ for NAT traversal<br/>         SNTP with time zone and Daylight Saving<br/>         TCP/UDP (RFC 793/768), RTP/RTCP (RFC 1889/1890), IPV4 ICMP (RFC 792)<br/>         VoIP VLAN Support 802.1Q, 802.1P<br/>         VLAN ID Range: 2 to 4094<br/>         VLAN Priority: 0 to 7 (Highest Priority)<br/>         QoS: DiffServ (RFC 2475), TOS (RFC 791, 1394)</p> |
| <p>Voice Gateway</p>   | <p>RFC 3261 compliance<br/>         Supports up to 4 SIP Trunks to Register<br/>         SIP UDP Protocol<br/>         Supports SIP compact Form<br/>         Supports SIP HOLD Type: Send Only, 0.0.0.0 or inactive<br/>         SIP Session Timer (RFC 4028)<br/>         SIP Session Refresher: UAC or UAS<br/>         SIP Encryption<br/>         MD5 Digest Authentication (RFC 2069 / RFC 2617)<br/>         Reliability of provision response PRACK (RFC 3262)<br/>         Early/Delay Media support<br/>         Offer/Answer (RFC 3264)<br/>         Message Waiting Indication (RFC 3842)<br/>         Event Notification (RFC 3265)<br/>         REFER (RFC 3515)<br/>         Supports Outbound Proxy<br/>         Supports Primary and Backup SIP Server<br/>         Supports STUN NAT Traversal<br/>         Supports "rport" parameter (RFC 3581)<br/>         Configure SIP local Port<br/>         SIP QoS Type: DiffServe or QoS<br/>         Accept Proxy Only : Yes or No</p>  |
| <p>Audio Codec</p>     | <p>G.711 A-law/<math>\mu</math>-law, G.729A, G.723.1 (6.3K, 5.3K)<br/>         Select voice codec priority : Local or Remote<br/>         Voice Payload size (ms) configuration<br/>         Silence Suppression<br/>         VAD/CNG<br/>         LEC : Line Echo Canceller<br/>         Max Echo Tail Length (G.168): 32, 64 and 128ms<br/>         Packet Loss Compensation<br/>         Automatic Gain Control<br/>         In-band/out of band DTMF (RFC 4733, RFC 2833 / SIP INFO)<br/>         Adaptive/Configurable Jitter Buffer<br/>         G.168 Acoustic Echo Cancellation<br/>         Configure RTP basic Port<br/>         RTP QoS Type : DiffServ or TOS<br/>         Phone Book (50 records) for peer to peer calls<br/>         Dialing Plan with drop, replace, Insert dialing digits<br/>         Selects first digit and inter digit timeout duration (Sec)<br/>         Selectable Call Progress Tone<br/>         Supports Specified Line Calling</p>   |

| Functions                   |  |
|-----------------------------|--|
| Call Functions              | <ul style="list-style-type: none"> <li>Supports Peer to Peer dialing</li> <li>4-line FXS connects to analog phone set or PABX</li> <li>Caller ID recognition DTMF (before/after 1st ring) and FSK (before 1st ring), ETSI and Bellcore</li> <li>DTMF Caller ID start and stop BIT configurable</li> <li>Tone Generation: Ring Back, Dial, Busy, call waiting, ROH, Warning, Holding, Stutter dial tone and disconnect tone</li> <li>Configure Tone Frequency, Cadence, Level and Cycle</li> <li>Select Tone specification by Country name List</li> <li>Global Country Based Tone Specification</li> <li>NAT Traversal support STUN, UPNP and Behind NAT</li> <li>Out-Band DTMF with RFC 2833 and SIP Info</li> <li>RFC2833 Payload type: 101 or 96</li> <li>DTMF send out ON and OFF Time configure</li> <li>DTMF incoming recognition Minimum ON and OFF time</li> <li>DTMF Relay Volume configuration</li> <li>T.38 FAX Volume configuration</li> <li>Flash Time transmit via SIP Info (Enable or Disable)</li> <li>Message Waiting Indication (Stutter Tone Notice)</li> <li>Blocks Anonymous Call</li> <li>Call Hold , Call Transfer</li> </ul> |
| FXS Line Configuration      | <ul style="list-style-type: none"> <li>Activates or deactivates : Line ID, Line Phone number</li> <li>Polarity Reversal detection or generation for call establish and Billing</li> <li>HOT Line to desired phone number</li> <li>Plays voice file to incoming call</li> <li>Repeats playing voice file counts</li> <li>Self-recorded voice files to upload</li> <li>Generates FLASH TIME to PSTN network</li> <li>T.38 or FAX Relay Type</li> <li>Incoming and outgoing dB value configurable</li> <li>Dialing Answer Delay time to establish call path</li> <li>Answers PSTN incoming call after how many ring cycles</li> <li>Caller ID detection mode by Country selection</li> <li>Outgoing SIP Caller ID Selection</li> <li>Supports 4 SIP Trunk</li> <li>Accepts desired SIP Proxy incoming calls Only</li> </ul>   |
| Flexible Routing Plan       | <ul style="list-style-type: none"> <li>Prefix Match and Length</li> <li>Priority Ring</li> <li>Cyclic Ring</li> <li>Simultaneous Ring</li> <li>Programmable Hunting Cycle</li> <li>Backup Routes with Digit Manipulation</li> <li>Default Routes</li> </ul>  |
| Flexible Dial Plans         | <ul style="list-style-type: none"> <li>Retrieves transfer call from 3rd party by dial code (default: *#)</li> <li>Inter digit time out setting</li> <li>First digit dial out delay time setting</li> <li>End of dial keypad number</li> <li>Dial Rule : Match dial prefix and maximum digits length (1-15)</li> <li>Phone Book can be exported or imported</li> </ul>  |
| FXS Analog 2-wire interface | <ul style="list-style-type: none"> <li>Flash Time Detection: range from 80 to 800 ms</li> <li>ON-HOOK Voltage -48Vdc</li> <li>Configure Ring Cadence, Frequency and Voltage</li> <li>Supports Polarity reversal for Billing</li> <li>Service Up to 1 Kilo-meter distance to analog telephone set</li> <li>Generate Current Drop Time (Open Loop Disconnect time)</li> </ul>  |

|                        |  |
|------------------------|--|
| Management             | Administrative Telnet CLI and HTTP, HTTPS<br>HTTP provision through MAC address<br>Multilingual Web User Interface<br>3 Levels of User Access Right with Password protection with different Web Language (Administrator, Supervisor and User)<br>HTTP/HTTPS Service Access limitation from WAN port<br>Configure Service ports at HTTP, HTTPS and telnet Services<br>Phone Debug Module: Device Control, Call Control, DB, Verbose<br>SIP Debug Module: Register, Call, SIP Message, Others<br>SNTP Debug Module<br>Device Debug Module<br>DSP Debug<br>Provides System Status Logs<br>Connect to external SYSLOG Server<br>Status display: Network, Line, SIP Trunk status<br>Diagnostics (debug through Syslog Event Notice)<br>Debug in real time by Telnet<br>Auto Provision via HTTP Server<br>SNMP v2 / Trap<br>Configuration Backup/Restore<br>Dual Firmware Image Backup<br>Reset to factory Default |
| <b>Environments</b>    |  |
| Power Requirements     | 12V DC, 1.5A   |
| Operating Temperature  | 0 ~ 45 degrees C   |
| Operating Humidity     | 10~90% relative humidity, non-condensing   |
| Weight                 | 500 g  |
| Dimensions (W x D x H) | 175×32×126 mm  |
| Emission               | CE, FCC, RoHS  |
| Connectors             | Two 10/100BASE-T RJ-45 Ethernet ports<br>Four RJ-11 ports<br>DC power jack   |

## Ordering Information

|           |                                 |
|-----------|---------------------------------|
| VGW-400FS | 4-Port SIP VoIP Gateway (4 FXS) |
|-----------|---------------------------------|

## Related Products

|                 |  |
|-----------------|--|
| VGW-400FO       | 4-Port SIP VoIP Gateway (4 FXO)                        |
| VGW-402         | 4-Port SIP VoIP Gateway (2 FXS + 2 FXO)                |
| VIP-2020PT      | Enterprise HD PoE IP Phone (2-line)                    |
| VIP-5060PT      | Professional HD PoE IP Phone (6-line)                  |
| VIP-362WT       | 802.11n Wireless Desktop IP Phone                      |
| VIP-256PT       | 802.3af PoE SIP IP Phone                               |
| VIP-156         | SIP Analog Telephone Adapter                           |
| VIP-156PE       | 802.3af PoE SIP Analog Telephone Adapter               |
| VIP-157         | 1 FXS / 1 FXO SIP Analog Telephone Adapter             |
| VIP-157S        | 2 FXS Analog Telephone Adapter                         |
| ICF-1700        | Touch Screen Internet Multimedia Phone                 |
| IPX-330         | Internet Telephony PBX System (30 user registrations)  |
| IPX-2100        | Internet Telephony PBX System (100 user registrations) |
| UMG-1000        | Desktop Unified Office Gateway                         |
| UMG-2200        | Unified Office Gateway (8-port FXO)                    |
| VIP-281 series  | 2-Port FXS H.323 / SIP / GSM VoIP Gateway              |
| VIP-480 series  | 4-Port FXS H.323 / SIP VoIP Gateway                    |
| VIP-880 series  | 8-Port FXS H.323 / SIP VoIP Gateway                    |
| VIP-1680 Series | 16-Port FXS H.323 / SIP VoIP Gateway                   |
| VIP-2480 Series | 24-Port FXS H.323 / SIP VoIP Gateway                   |

### PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City  
 231, Taiwan (R.O.C.)  
 Tel: 886-2-2219-9518 Fax: 886-2-2219-9528  
 Email: sales@planet.com.tw www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2013 PLANET Technology Corp. All rights reserved.

**C-VGW-400FS**