



Renewable Energy PoE Network Solution

The Benefits of Renewable Energy PoE Network Solution





Reduce environmental impact



Intuitive remote network management

Intelligent Renewable Energy Management Controller

PLANET NMS-360 and NMS-360V-10/12 Renewable Energy Management Controllers provide a powerful and intuitive way to centrally monitor and manage the network and power usage.

- > Detect up to 512 remote devices
- > Real-time network status and energy usage
- > PoE configuration

Traffic logs compliant with SNMP, MQTT Protocol and PLANET Smart Discovery

NMS-360 Series Intuitive Management Interface







Dashboard



Device Information

Industry-leading Integration of PoE Technology and Renewable Power Systems

PLANET BSP-360 Industrial Renewable Energy 802.3at PoE+ Managed Switch/Router is designed for deploying surveillance and wireless networks in remote areas. The BSP-360 can be charged by renewable energy which helps to economically power and manage IP cameras and APs, no matter how expansive the applications, such as dams, forests, deserts, national parks, animal protection areas and highways, etc., are.

- > Charged by renewable energy (solar, wind, hydro, etc.)
- > Smart battery management
- > 120W power budget
- > Centrally manage 512 BSP-360 units with NMS-360










Wireless Connection for Outdoor Long-range Application

PLANET NMS-360 Series Renewable Energy Management Controller allows users to remotely monitor the statuses of the BSP-360 in real time, including green power status, average power usage, instant PoE usage, and so on. Through remote web management, IT administrator at the headquarters will be able to monitor and control those remote powered devices powered by the BSP-360. The BSP-360's built-in four 802.3at/802.3af PoE ports allow the administrator to flexibly install PoE wireless APs in remote areas, without worrying about locating extra electric outlets. When functioning with a pair of the wireless transmission units, the BSP-360

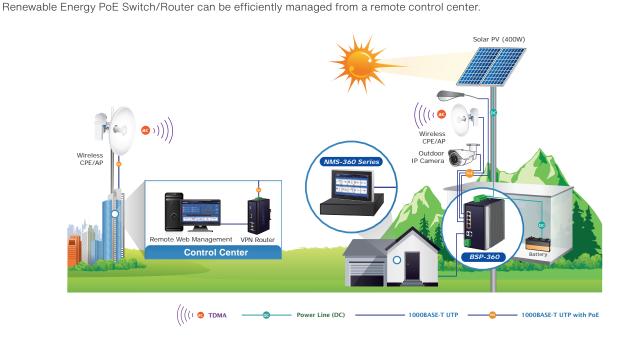

Renewable Energy Management Controller				
Model	NMS-360	NMS-360V-10	NMS-360V-12	

Renewable Energy PoE Switch/Router

Model BSP-360

Product Image







Product Image



Hardware Interface				
LCD	_	10" Touch Panel	12" Touch Panel	
HDMI	-	1 x HDMI	1 x HDMI	
GbE Ethernet	5 x GbE LAN RJ-45	2 x GbE LAN RJ-45	2 x GbE LAN RJ-45	
USB	2 x USB 3.0	2 x USB 3.0	2 x USB 3.0	
Serial	One RJ45 Console port	_	-	
Watt	60W power adaptor (Level 6)	10": 23.7W	12": 29W	
Software Feature				
Number of Managed Devices (BSP-360)	512	512	512	
Number of IP cameras	2,048	2,048	2,048	
DashboardSetup WizardNode DiscoveryScalability	 Event Table Alarm System Site Map User Control Device Provisioning App-like Device Viewing Backup/Restoration/Read User Account Management 			
Network Services				
DDNS	Supports PLANET DDNS/Easy DDNS			
DHCP	Built-in DHCP Server for auto IP assignment to APs			
Management	SSL; Web browser (Chrome is recommended)			
	SNMP v1, v2c, v3			
Discovery	Supports SNMP, ONVIF and PLANET Smart Discovery			
Standards Conformance				
Regulatory Compliance	CE, FCC			
	IEEE 802.3 10BASE-T			
Standards Compliance	IEEE 802.3u 100BASE-TX			

IEEE 802.3ab Gigabit 1000BASE-T

LAN	10/100/1000	5	
PoE	802.3at	4	
PoE Budget		120 watts	
PSE Type		End-span	
PoE Power Pin		1/2(+), 3/6 (-)	
PoE Power Voltage		51V DC	
Management		Web/SNMP/MQTT	
System Voltage/ Battery Requirement		24V DC	
Power IN		Solar or turbines 24~45V DC	
Max. Charge Current		10A (40V 10A, 400W)	
Battery Type		Lithium/Lead Battery	
Features		* 24V DC, 2A output load * Battery current status * Low voltage protection & alert * PoE schedule and management	

Note:

Check the total power consumption of your device and the sunshine duration of your area from weather bureau for a proper PV. Improper PV could shorten the battery life or provide insufficient power to Renewable Energy PoE Switch/Router.



