

4-Port H.323 / SIP VoIP Gateway



With years of Internet telephony and router manufacturing experience, PLANET proudly introduces the newest member of the PLANET VoIP gateway family to you: the VIP-480/VIP-480FS/VIP-480FO.

The PLANET VIP-480 series VoIP Gateway is fully both SIP and H.323 standard compliant residential gateway that provides a total solution for integrating voice-data network and the Public Switched Telephone Network (PSTN). It is not only provides high quality voice communications, but also offers secure, reliable Internet sharing capabilities for daily voice and Internet communications.

With advanced DSP processor (TI) and cutting edge VoIP technology, the PLANET VIP-480 series are capable of handling both SIP and the H.323 calls. With up to 4 registrations to the SIP proxy or H.323 Gatekeeper, the VIP-480 series are able to make calls to either H.323 or SIP voice communication environment. The VIP-480 is equipped with a four port Ethernet switch and built-in NAT router function that provides Internet access using only one IP address; with these features, users can now enjoy high quality voice calls and secure Internet access without interfering with routine activities.

Meanwhile, into traditional PBX system.

With built-in PPPoE/DHCP/DDNS clients, up to 4 concurrent connections in VIP-480, voice communications can be established in anywhere around the world. The PLANET VIP-480 comes with intuitive user-friendly, yet powerful management interface (web/telnet), that can dramatically reduce IT personnel resource, and complete VoIP deployment in a short time, plus remote management capability, VoIP administrators can monitor machine/network status, or proceeds maintenance/trouble-shooting service via Internet browser or telnet session.

Besides, it provides voice channels status display and optimized packet voice streaming over managed and public (Internet) IP networks.

KEY FEATURE

Network Features

- **Network Address Translation (NAT)**
NAT allows multiple PCs to connect to an Internet Service Provider (ISP) using a single Internet access account.
- **Point-to-Point Protocol over Ethernet (PPPoE) Client Support**
If you are a DSL user, the router has a built-in PPPoE client for establishing a DSL link connection with the ISP. There is no need to install a further PPPoE driver on your computers.
- **Smart QoS**
The smart QoS provides stable voice quality while user access internet from private LAN to internet at the same time. This device would start suppressing throughput automatically when VoIP call proceed and keep full speed access when there is no VoIP traffic.
- **DDNS (Dynamic Domain Name Server)**
DDNS is a service that maps Internet domain names to IP addresses. It allows you to provide Internet users with a domain name (instead of an IP Address) to access your Virtual Servers.
- **Virtual Server**
Remote Users can access services such as the Web or FTP at your local site via public IP addresses can be automatically redirected to local servers configured with private IP addresses.

VoIP Features

- H.323 / SIP dual mode communication
- SIP 2.0 (RFC3261), H.323v4 compliant
- Peer-to-Peer / H.323 GK / SIP proxy calls
- Voice codec support: G.711 (A-law / u-law), G.729 AB, G.723 (6.3 Kbps / 5.3Kbps)
- Voice processing: Voice Active Detection, DTMF detection, G.165/G.168 compliant echo canceller, silence detection, FAX (T.38 / T.30) Mode Option.
- Built in adaptive buffer that helps to smooth out the variations in delay (jitter) for voice traffic.
- Voice channels status display: This function display each port status likes as on-hook, off-hook, calling number called number, talk duration, codec.
- Life line support for VIP-480


SPECIFICATION

Product 4-Port H.323/SIP VoIP Gateway

Model	VIP-480	VIP-480FS	VIP-480FO
Hardware			
WAN	1 x 10/100Mbps RJ-45 Port		
LAN	4 x 10/100Mbps RJ-45 Port		
Voice	4 x RJ-11 connection (2 x FXS, 2 x FXO)	4 x RJ-11 connection (4 x FXS)	4 x RJ-11 connection (4 x FXO)
Protocols and Standard			
Standard	H.323 v2/v3/v4 and SIP (RFC 3261) , SDP (RFC 2327), Symmetric RTP, STUN (RFC3489), ENUM (RFC 2916), RTP Payload for DTMF Digits (RFC2833), Outbound Proxy Support.		
Voice codec	G.711 (A-law /u-law), G.729 AB, G.723 (6.3 Kbps / 5.3Kbps)		
Fax support	T.30, T.38		
Voice Standard	Voice Activity Detection (VAD) Comfort Noise Generation (CNG) G.165/G.168 Echo cancellation Dynamic Jitter Buffer		
Protocols	SIP 2.0 (RFC-3261), H.323, TCP/IP, UDP/RTP/RTCP, HTTP, ICMP, ARP, NAT, DHCP, PPPoE, DNS		
Advanced Function	Virtual Server, Smart QoS, IP TOS (IP Precedence) / DiffServ, Build-in NAT router function		
Network and Configuration			
Access Mode	Static IP, PPPoE, DHCP		
Management	Web, Telnet		
LED Indications	System: PWR WAN: 1, LAN/ACT LAN: 4, LNK/ACT Voice 4, In-Use/Ringing		
Dimension (WxDxH)	260 x 135 x 35 mm		
Operating Environment	0~40 Degree C, 0~95% humidity		
Power Requirement	12V DC		
EMC/EMI	CE, FCC Class B		

APPLICATIONS

VIP-480 series multi-office voice communication

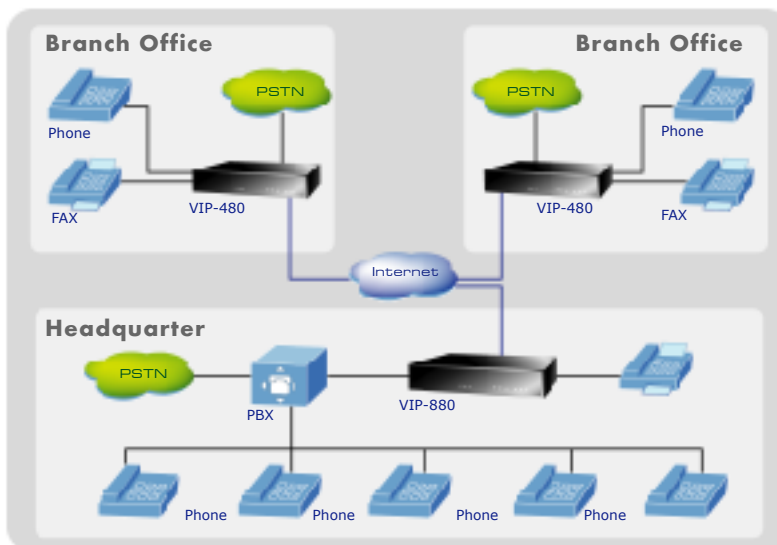

ORDERING INFORMATION

VIP-480	H.323 / SIP VoIP Gateway (1 x WAN, 4 x LAN, 2 x FXO / 2 x FXS; life line support)
VIP-480FS	H.323 / SIP VoIP Gateway (1 x WAN, 4 x LAN, 4 x FXS)
VIP-480FO	H.323 / SIP VoIP Gateway (1 x WAN, 4 x LAN, 4 x FXO)