

30-meter Infrared Camera




Providing Better Lens for Clearer and Sharper Surveillance Image

PLANET provides various camera solutions for users to solve different security issues. Working with PLANET Digital Video Recorders or Internet Video Servers, the CAM-IR338 helps people easily create a secure protection system for their daily lives.

The new CAM-IR338 provides you with better lens, processor, and resolution, when compared with the last version. It produces pictures reaching 700TV Lines (TVL) of horizontal resolution when integrated with the highly sensitive color Sony DSP 1/3" interline transfer Charge Coupled Device (CCD) image sensor. Its auto-iris lens will then adjust the amount of light that passes through the lens automatically to help form a sharp and clear image.

TV Lines are a measure of horizontal resolution that must be measured using a specialized chart like the one shown below. It helps to detect the number of TV Lines that a camera produces because the human eyes cannot detect them.

TVL Specialized Chart

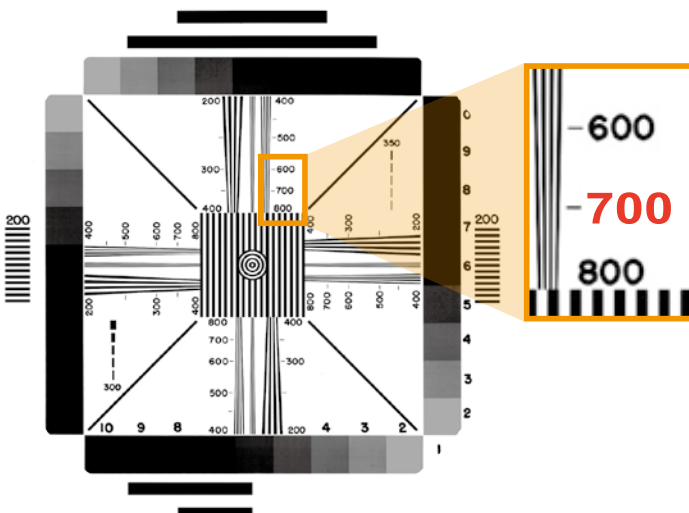

Camera

- 1/3" Sony Exview 960H Super HAD II High Resolution CCD Sensor
- Employs Sony Enhanced Effio-E Digital Signal Processor (DSP) chip-set
- Board Lens 6mm / F2.0
- 0.01 Lux with built-in IR LED
- Maximum resolution 700 TV lines
- Built-in highly-efficient 48 IR LEDs for low light and long distance up to 30 meters

Video

- Picture Elements NTSC: 976x494, PAL: 976x582
- Auto White Balance 1800K~10500K
- Auto Gain Control and White Balance
- Auto Electronic Shutter Time (NTSC: 1/60s~1/100,000s, PAL: 1/50s~1/110,000s)
- S/N Ratio more than 60dB
- Image Enhancement with ATR / 2DNR

Hardware

- Video Output: 1 Vp-p Composite Video / 75 Ohms
- IP66 weatherproof certified protection
- Analog operation, easy to install and fast reaction



Sony Effio 700 TVL DSP

Comparison of Different TVL Resolutions

Dedicated Monitoring with Highly Sensitive DSP

The CAM-IR338 adopts Sony Enhanced Effio-E Digital Signal Processor (DSP) chip-set to provide clearer pictures with higher sensitivity compared to conventional CCTV cameras. The "Effio" stands for Enhanced Features and Fine Image Processor and realizes a horizontal resolution of maximum 700 TVL in combination with 1/3" Sony Exview 960H HAD II CCD image sensor. With Digital Signal Processor (DSP) chip-set, it can make the camera process speedier and more efficient, and save more electricity. With EXview HAD CCD II, the CAM-IR338 can clearly record events in both bright and dark surroundings.



High Tech, High Quality, High Protection

The CAM-IR338 applies Adaptive Tone Reproduction (ATR) technology to improving the visibility of the entire picture by providing the optimum gradation compensation for the image in one field based on the luminance information. Furthermore, the CAM-IR338 provides high quality images under all lighting conditions. Adopting the 2-DNR (Digital Noise Reduction) technology, the CAM-IR338 automatically reduces noises in low light environment and brings an extremely clear and exquisite picture quality even under any challenging lighting conditions.



Full Surveillance during Day & Night Functionality

For a clear surveillance image both in the day and night, the CAM-IR338 built-in 48 IR LEDs can offer a long IR distance of up to 30 meters. The 700TV Lines performance makes the image still clear even at night.

The CAM-IR338 is also equipped with ICR 6mm / F2.0, and its auto-iris function can automatically adjust the amount of light that passes through the lens. Thus, the CAM-IR338 is able to maintain clear images 24 hours a day.



IP66-rated Housing for Indoor and Outdoor


In order to fit different security issues, the CAM-IR338 is the better product of surveillance system to meet the demands from worldwide market. By providing IP66 weatherproof certified protection, 700 TVL high-quality images and long IR distance Infrared LED solutions, the CAM-IR338 definitely is the perfect choice for your indoor and outdoor surveillance system.



Applications


Taking advantage of the convenient TCP/IP network, the surveillance system administrators can integrate different kinds of cameras such as the CAM-IR338 IR camera with PLANET DVR system to establish 24/7 indoor and outdoor secure surveillance applications, and to ensure a secure environment to protect people's life.

Connection with DVR

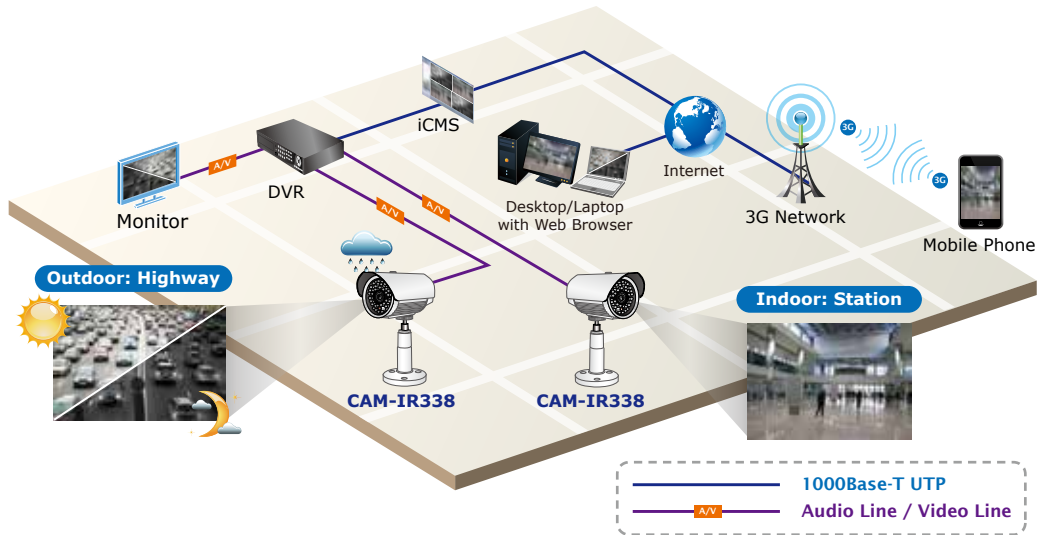

The CAM-IR338 can work with PLANET IVS-H125P, the PoE Internet Video Server, enabling you to monitor your house, office or production line in the factory through Internet. The administrators can easily place the IVS-H125P wherever a network connection is available and efficiently turn the analog camera monitoring system into IP-based surveillance.

Turn Analog into IP

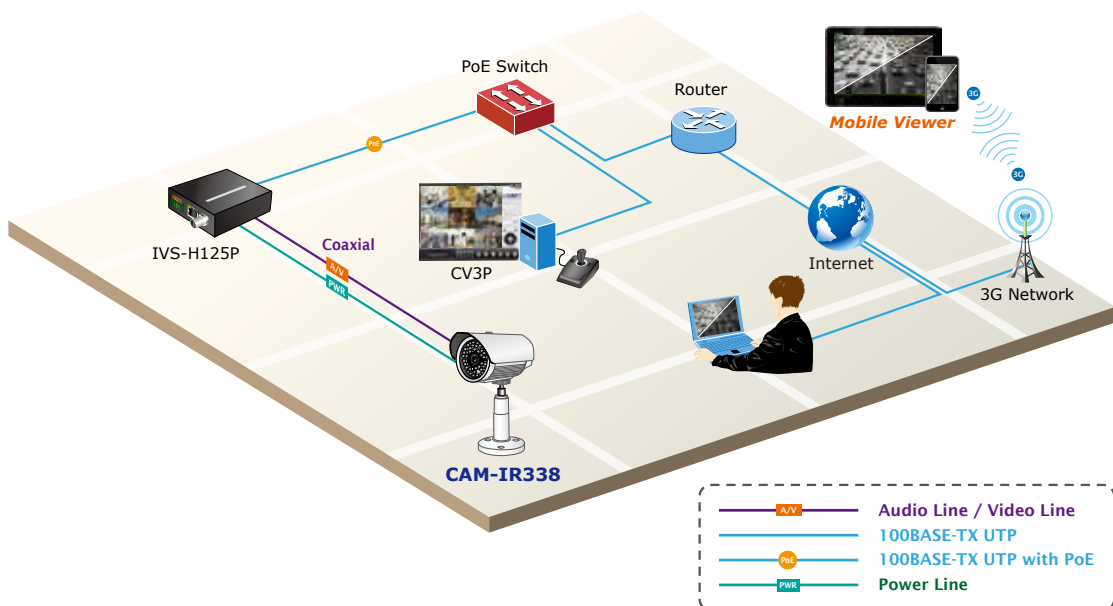

Specifications

| | |
|-----------------------------------|---|
| Model | CAM-IR338 |
| Camera | |
| Sensor | SONY 1/3" Exview Super HAD II High Resolution CCD |
| Effective Picture Elements(H x V) | NTSC:976 x 494 PAL:976 x 582 |
| Signal Processor | Sony Enhanced Effio-E DSP |
| Lens Furnished | Board Lens 6.0mm / F2.0 |
| Minimum Illumination | 0.01 Lux with built-in IR LED |
| LED | |
| IR LED | 48 Units of 850nm High Power IR LED |
| IR Project Distance | 30 meters |
| Video & Audio | |
| Horizontal Resolution | 700 TV lines |
| S/N Ratio | More than 60 dB |
| White Balance | Automatically (1800K ~ 10500K) |
| Gamma Characteristic | 0.45 |
| Gain Control | Automatically |
| Auto Electronic Shutter | NTSC:1/60s~1/100,000s PAL:1/50s~1/110,000s |
| Adaptive Tone Reproduction | ON |
| 2D Noise Reduction | 2DNR ON |
| Synchronous System | Internal, Negative Sync |
| Environment | |
| Operating Temperature | -10 to 50 degrees C (14 to 122 degrees F) |
| Video Output | 1 Vp-p Composite Video / 75 ohms |
| Power Supply | 12V DC, 400mA |
| Water Resistance | IP66 |
| Dimensions (Φ x L) | 69 x 132 mm |

Ordering Information

| | |
|--------------|---------------------------------|
| CAM-IR338-NT | 30-meter Infrared Camera (NTSC) |
| CAM-IR338-PA | 30-meter Infrared Camera (PAL) |

Related Products

| | |
|---------------|--|
| IVS-H125 | H.264 Internet Video Server |
| IVS-H125P | H.264 PoE Internet Video Server |
| IVS-2120 | Industrial Internet Video Server |
| DVR-462 | 4-channel H.264 Digital Video Recorder |
| DVR-872 | 8-channel H.264 Digital Video Recorder |
| DVR-1672 | 16-channel H.264 Digital Video Recorder |
| CAM-IR138-NT | 15-meter Infrared Camera (NTSC) |
| CAM-IR138-PA | 15-meter Infrared Camera (PAL) |
| CAM-IR560V-NT | 50-meter Infrared Vari-focal Camera (NTSC) |
| CAM-IR560V-PA | 50-meter Infrared Vari-focal Camera (PAL) |
| CAM-IVP55-NT | 25-meter Infrared Vandalproof Camera (NTSC) |
| CAM-IVP55PA | 25-meter Infrared Vandalproof Camera (PAL) |
| CAM-IVP55V-NT | 25-meter Infrared Vari-focal Vandalproof Camera (NTSC) |
| CAM-IVP55V-PA | 25-meter Infrared Vari-focal Vandalproof Camera (PAL) |