*** FW & Utility version List:

CV3Lite/ Pro

Windows XP, Win7 32/64

CV3Lite

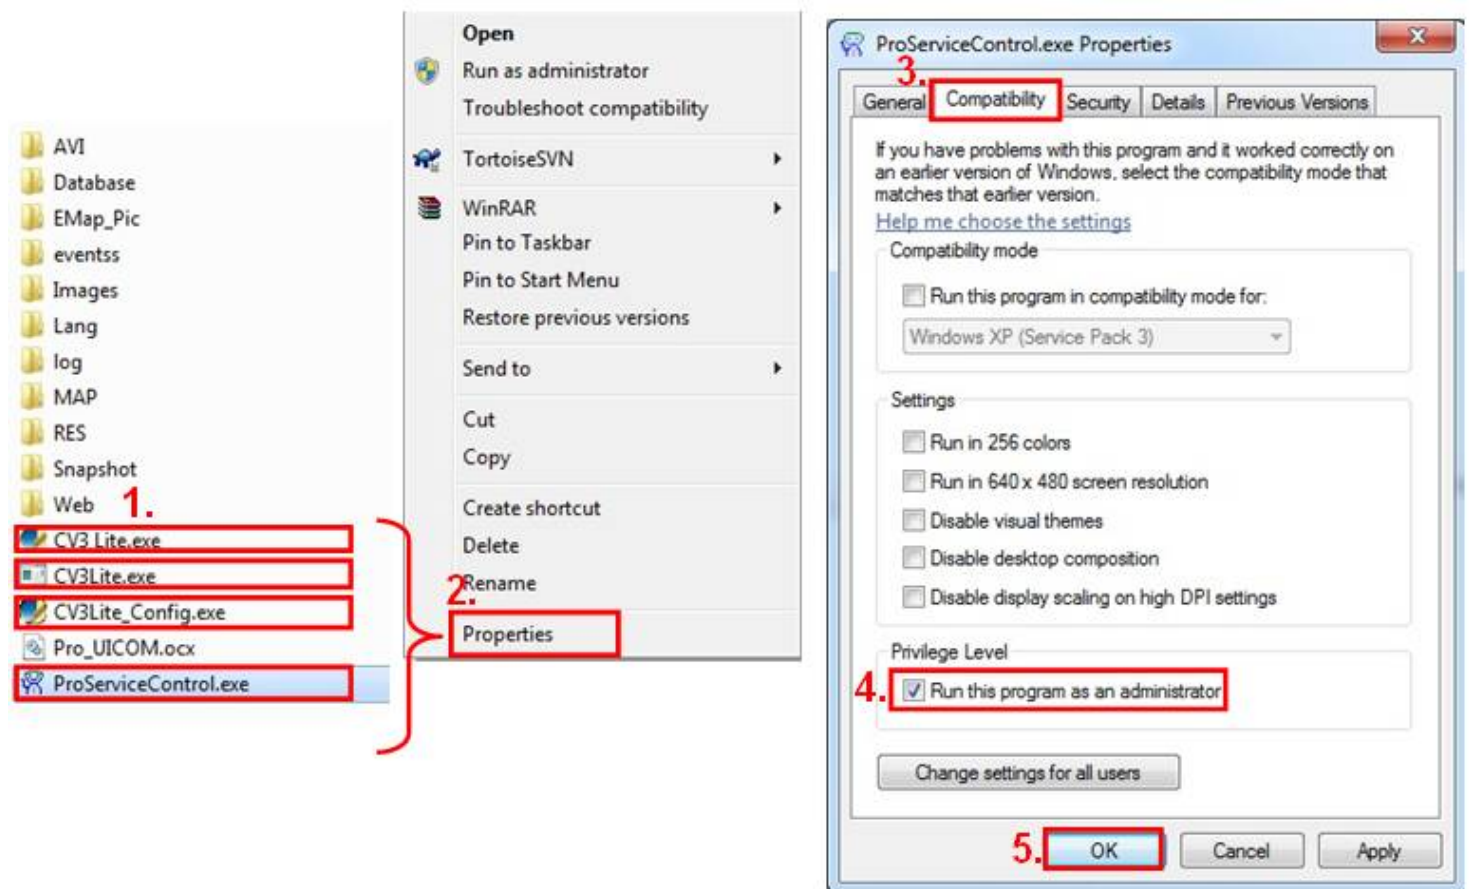==

Step1. (If your system is Vista or Win7)

After install CV3Lite complete, please set your CV3Lite CMS program to "**Run this program as an administrator**".

Please follow bellow steps.

(1) Go to your CV3Lite install directory, and you will see the four program "**CV3_Lite.exe, CV3Lite.exe, CV3Lite_Config.exe, ProServiceControl.exe**", please select "**CV3_Lite.exe"** program and right-click your mouse button.

(2) Select "**Properties**".

(3) Go to "**Compatibility**" page.

(4) Tick the "**Run this program as an administrator**".

(5) Press "**OK**" button.

(6) Re-do Step (2) to Step (5) to program "**CV3Lite.exe, CV3Lite_Config.exe, ProServiceControl.exe**".

CV3Pro

==

Step1. (If your system is Vista or Win7)

After install CV3Lite complete, please set your CV3Pro program to "**Run this program as an administrator**".

Please follow bellow steps.

(1)Go to your CV3Pro install directory, and you will see the four program "**CamViewer3Pro.exe, CV3 Pro Contoller.exe, CV3 Pro Montior.exe, CV3_Pro Config.exe**", please select "**CamViewer3Pro.exe**" program and right-click your mouse button.

(2)Select "**Properties**".

(3)Go to "**Compatibility**" page.

(4)Tick the "**Run this program as an administrator**".

(5)Press "**OK**" button.

(6)Re-do Step (2) to Step (5) to program "**CV3 Pro Contoller.exe, CV3 Pro Montior.exe, CV3_Pro Config.exe**".
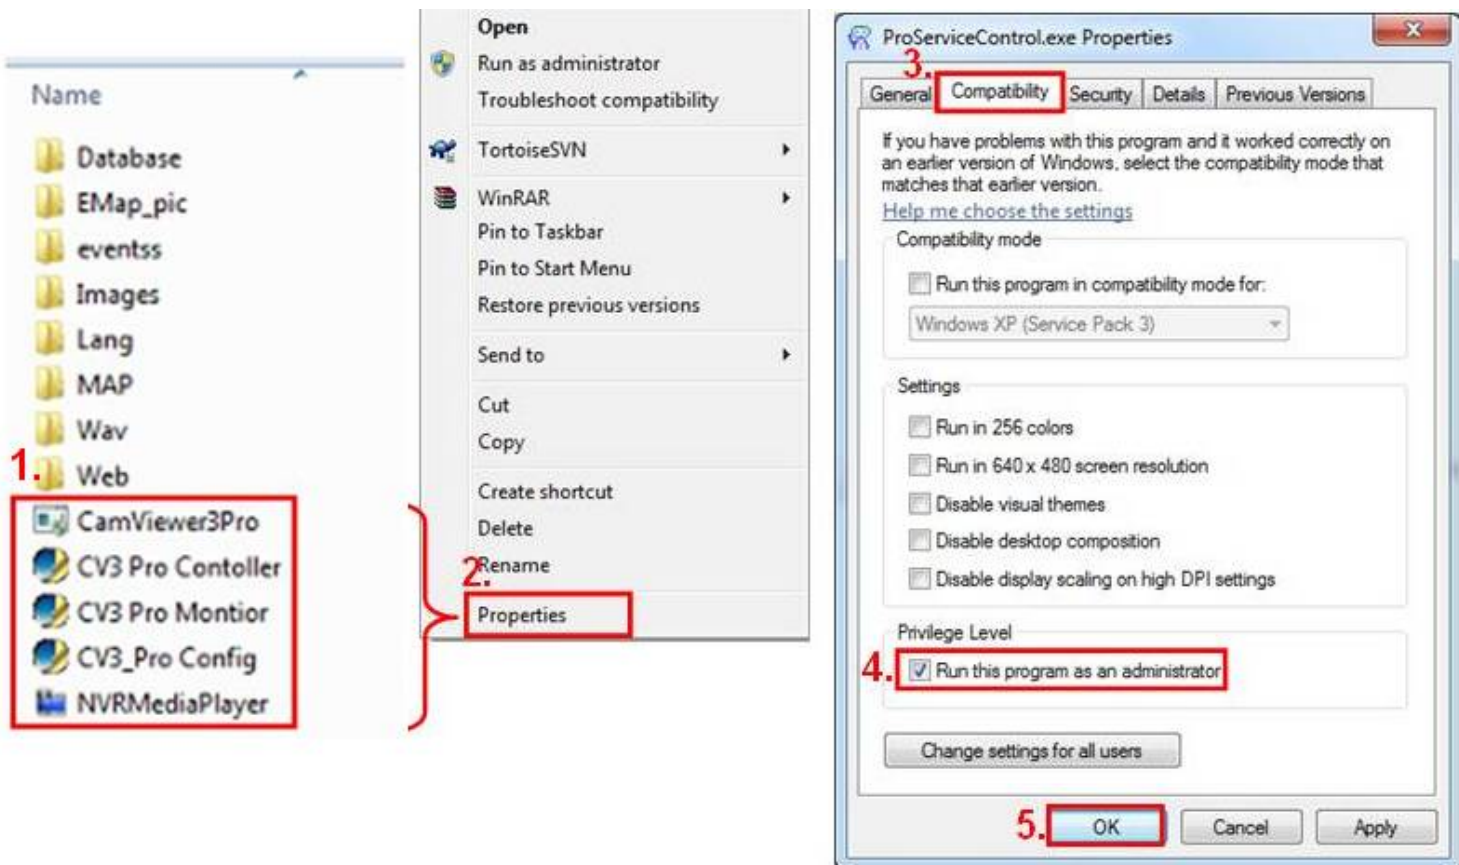
Step2. Create CV3Lite user account

After install CV3Lite complete, pleas go to your install directory first, and open the "**CV3Lite_Config.exe**".

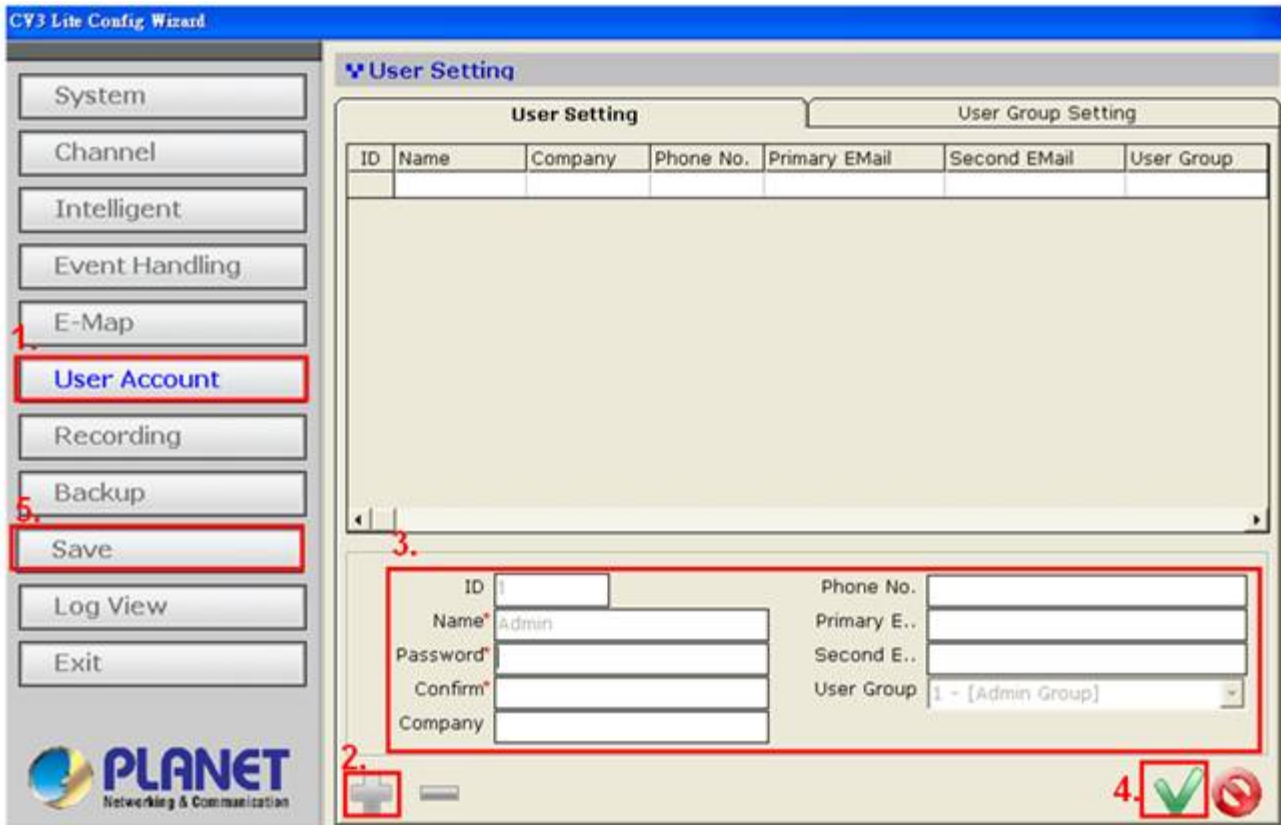Please let username and password blank, and then press the "**Login**" button.

(1) Goto "**User Account**" page.

(2) Press "**Create**" button.

(3) Key-in the user account "**username & password**".

(4) Press "**Apply**" button.

(5) Press "**Save**" button.

Step3.Add the IP-Cameras to CV3Lite

Please press the "**CAM Setting**" button, and it will open the CV3Lite Config Wizard.
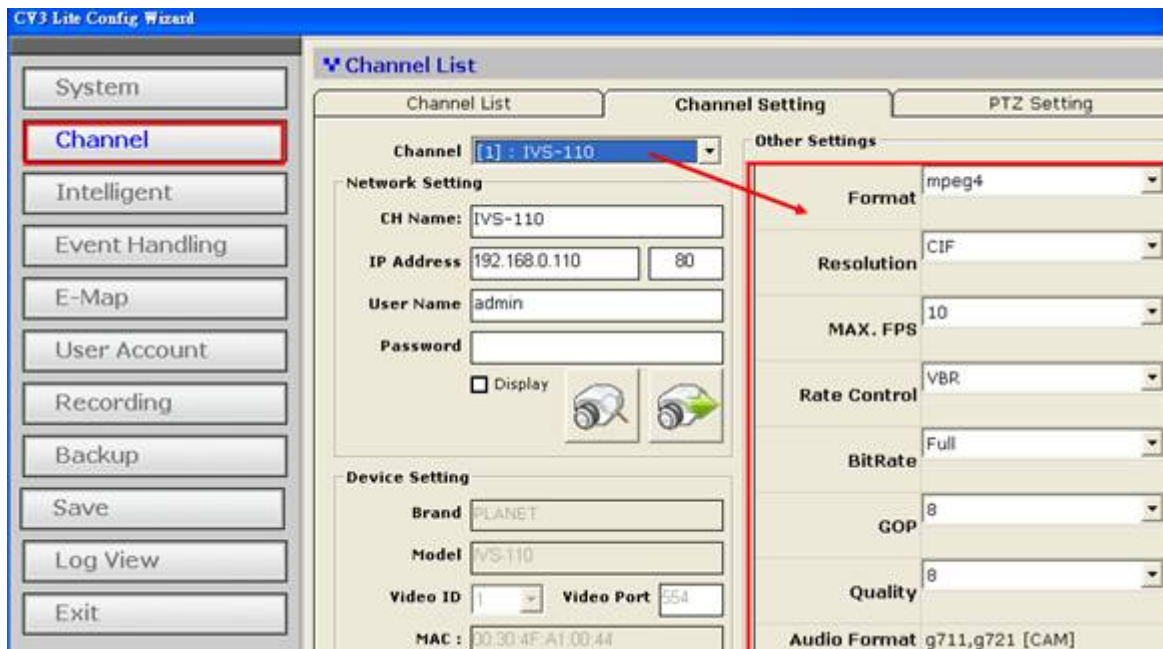
Select the "**Channel**" page and select the channel (IP-Camera) to configure your fps, quality.

After IP-Cameras setting complete, please press "**Save**" button.

Step4. Open CV3Lite/Pro

Please open your CV3Lite/Pro and use created account to login.

Note：If you want auto login CV3Lite/Pro, please don't create any user account, and the default username and password is blank.